



- 8 kW
- Double walled construction - grey
- Soapstone top plate
- Window aircleaning system
- Cast iron grade
- Fuel switch
- Vermiculite firebox
- Flue connection top/rear: 150 mm
- H x W x D: 1099x550x400 mm
- For continuous use
- Fuel: wood, lignite



Airlogic



FirePlus



TripleAir



Cleaning Air



Double casing



Wood




Continuous use



Brown coal

|                               |                                        |
|-------------------------------|----------------------------------------|
| Certification                 | 1.+2.Stufe 1.BImSchV, CE, 15aB-VG, VKF |
| Heat output (kW)              | 8                                      |
| Min-max heat output (kW)      | 4,0-8,1                                |
| Heat capacity (m3)            | 182                                    |
| Flue connection back,top (mm) | 150                                    |
| Flue gas quantity (g/s)       | 7,7                                    |
| Flue gas temperature (C)      | 302                                    |
| Air needs Pa                  | 12                                     |
| Size H x W x D (mm)           | 1099x550x400                           |
| Fuel                          | wood, lignite                          |
| Window size H x W (mm)        | 430x340                                |
| Firebox size W x D x H (mm)   | 370x250x420                            |
| Net weight (kg)               | 120                                    |

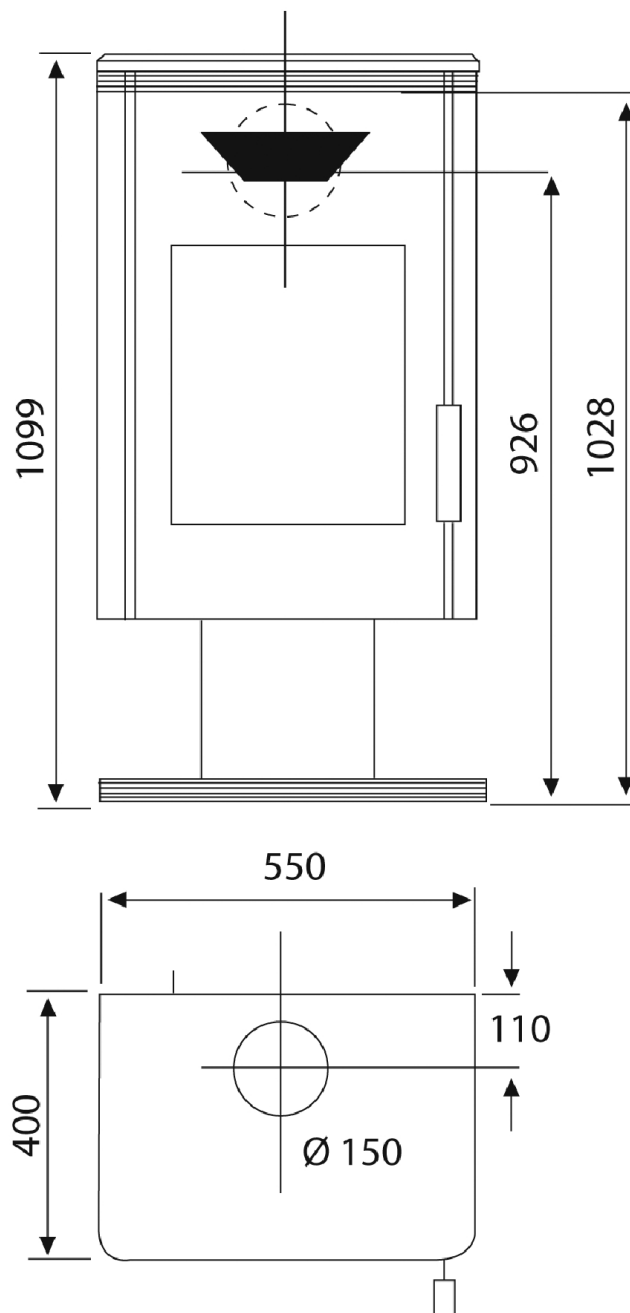

**Wamsler SE**  
3100 Salgótarján, Rákóczi út 53-55  
[www.wamsler.hu](http://www.wamsler.hu)