



- 6,5 kW
- Build-in thermostat
- Programmable
- 30 kg pellet tank
- Extern Air
- Soapstone cover
- 95 % efficiency
- Flue connection hátsó: 80 mm
- H x W x D: 1218x585x534 mm
- For continuous use
- Fuel: pellet



Extern Air



Automat



Heat storage



Cleaning Air





Double casing



Continuous use

Certification	1.+2. Stufe 1.BImSchV, CE, 15aB-VG
Heat output (kW)	6,5
Min-max heat output (kW)	2,5-6,5
Heat capacity (m3)	325
Flue gas quantity (g/s)	5,7
Flue gas temperature (C)	166
Air needs Pa	12
Size H x W x D (mm)	1230x584x564
Fuel	pellet (DIN 51731, DINplus, ÖNORM M7135)
Net weight (kg)	130

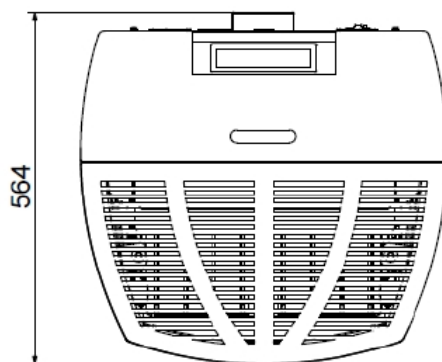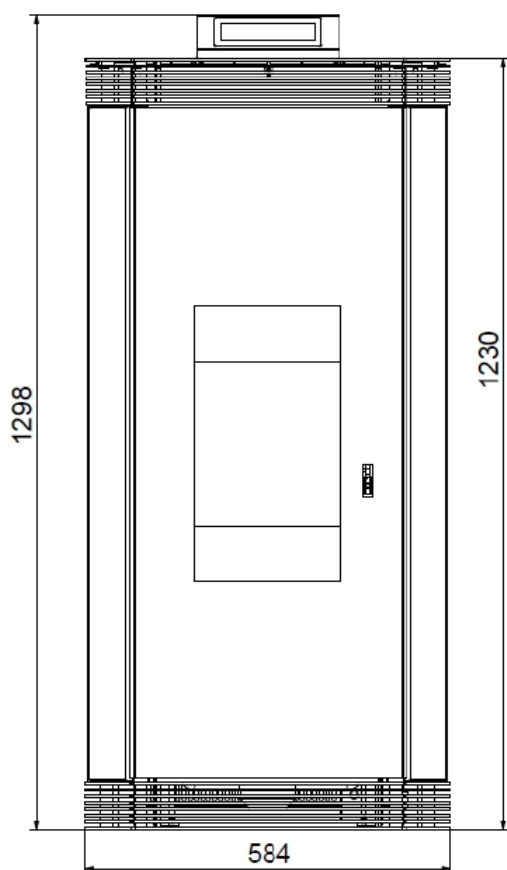

WP2-8K (GRAN PELLET)

